




**RoHS compliant
Small Form Pluggable (SFP+)
SFP+ DWDM 80KM Optical Transceivers**

EEPROM Information

EEPROM memory map specific data field description is as below:

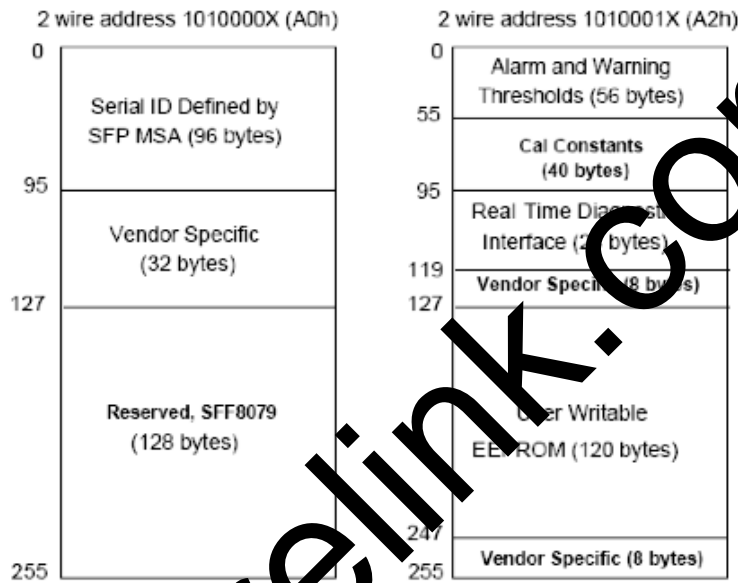

Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy

Parameter	Range	Accuracy	Calibration
Temperature	-5 to +70°C (C)	±3°C	Internal
Voltage	2.97 to 3.63V	±3%	Internal
Bias Current	0 to 100mA	±10%	Internal
TX Power	-1 to +3dBm	±2dB	Internal
RX Power	-27 to -7dBm	±3dB	Internal